

Product Name: RGB Bluetooth LED Controller




I: Product Parameter:

Category	LED Controller
Domination Principle	BT
Language	Chinese、English、German、Japanese
Operation Platform	Android 5.0 or IOS 9.0 or higher
LED Drive Type	Constant voltage: MOSFET
Channels	GRB
Input Voltage	DC (5-24) V
Max Output Power	72W
Work For	LED Strip or other constant voltage lights
Connect Method	Common Anode
Working Temperature	-20~+55°C
Control Distance	BT: 20m, Remote controller: 10m
Certification	CE, RoHS, FCC
Warranty	1 Year
Net Weight	20g
Dimension(L*B*H)	55MM*16MM*0.5MM

II: APP Interface Instruction

a) Support 16 million color control and brightness adjustment

You can adjust both the color RGB(Red/Green/Blue) as well as the brightness of the color. It's likewise possible in this function to adjust and store 5 own created colors and brightness levels. You can save this, if you press long on the “DIY” button. The adjusted color/brightness will be stored and displayed in the “DIY” button. You can recall the color/brightness if you press shortly on one of the five DIY buttons. On the display top left, the individual channels R/G/B can be called separately and adjusted from 0-255 to obtain the desired color.

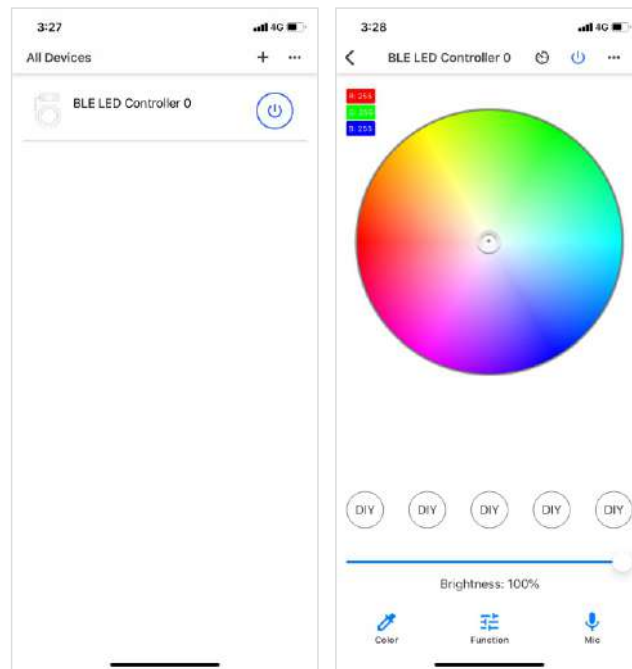

b) Function


In this capacity, 20 programmed are preset. In addition, you can adjust the speed of the gradients with a slider. With the keys M+/M- or scroll up and down you can switch between the preset modes.



c) Microphone function


Click/ go to “Mic” interface of the APP.

In this function the connected LED light lights up depending on the volume/noise from the outside like a microphone. This also works when playing music or there is a noise from outside, the light will begin “dancing” base on different rhythm. The microphone sensitivity can be adjusted by the slider.

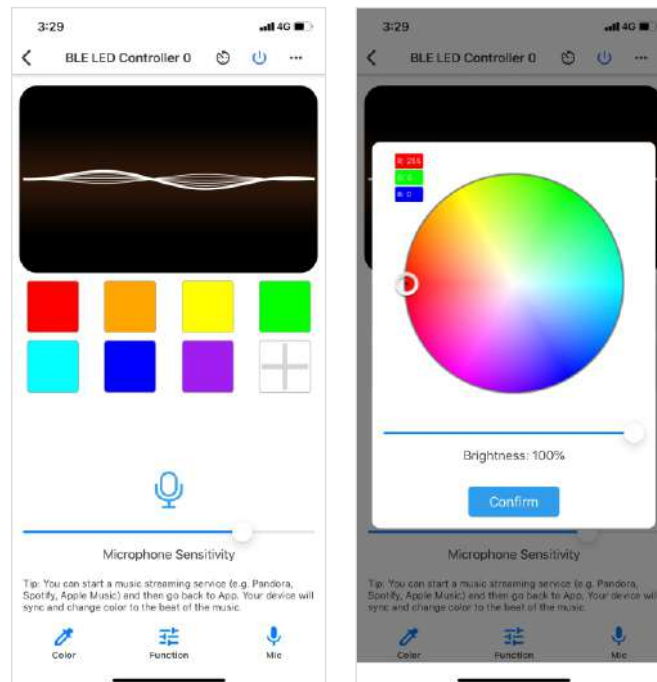

d) Support delay light off setting

Click the delay icon at the top to set the delay off time to make life more convenient.


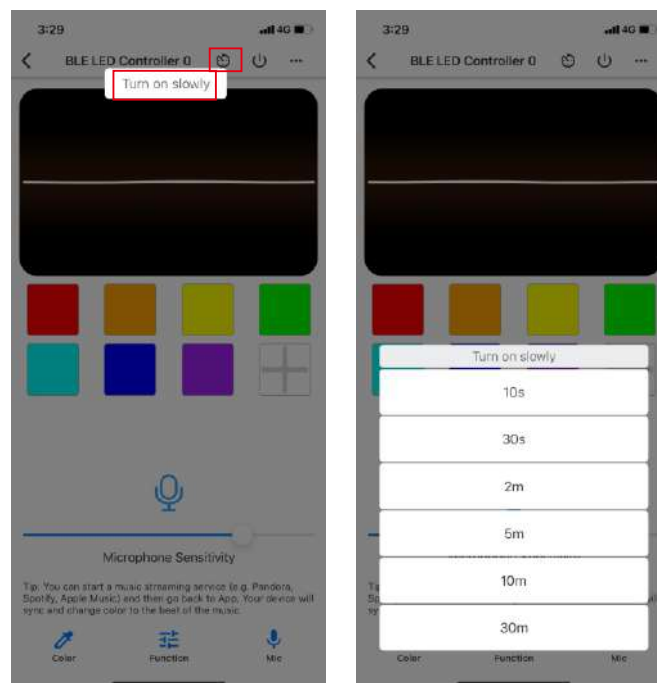


e) Group Function: control all the LED lights at the same time

- 1) Create group(s) and add the LED lights into group(s).
- 2) You can control the LED lights with color change, brightness change, turn on/turn off etc.
- 3) You can rename group(s) to make them easier for use .

f) Light timer

The controller has a built-in timer function. You can have your lights automatically turn on or off in a specified time by setting up the timer. Press on the top right, next to ON/OFF, switch the clock icon. Then the selection menu will be shown with time, Repeat (Mon-Sun), ON/OFF switch and the optional Model (color setting, Brightness and gradient program.) The timer will not operate when the power supply is interrupted. In this case, start the APP to resynchronize.

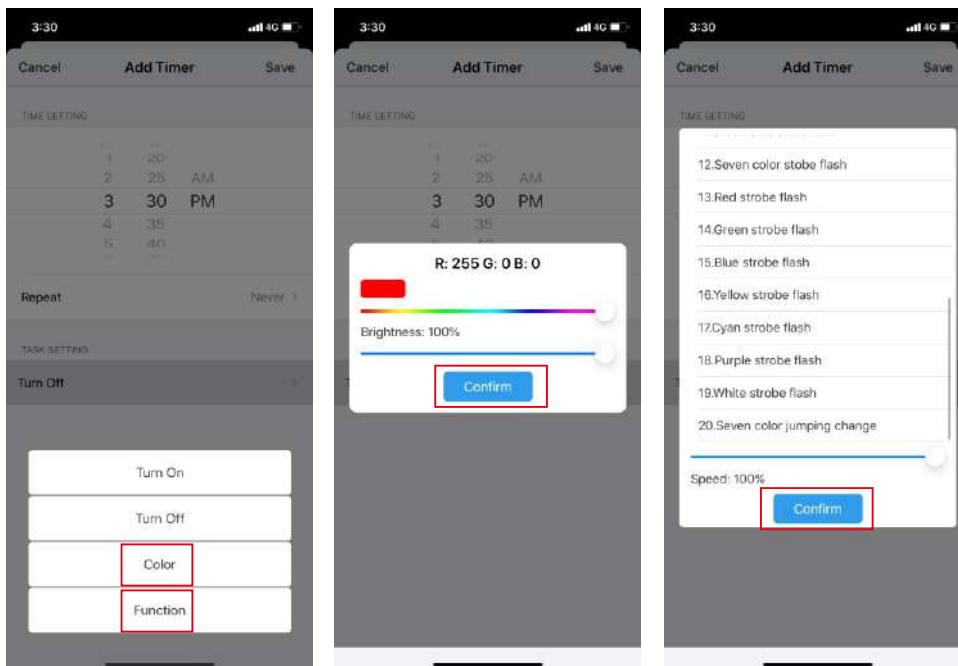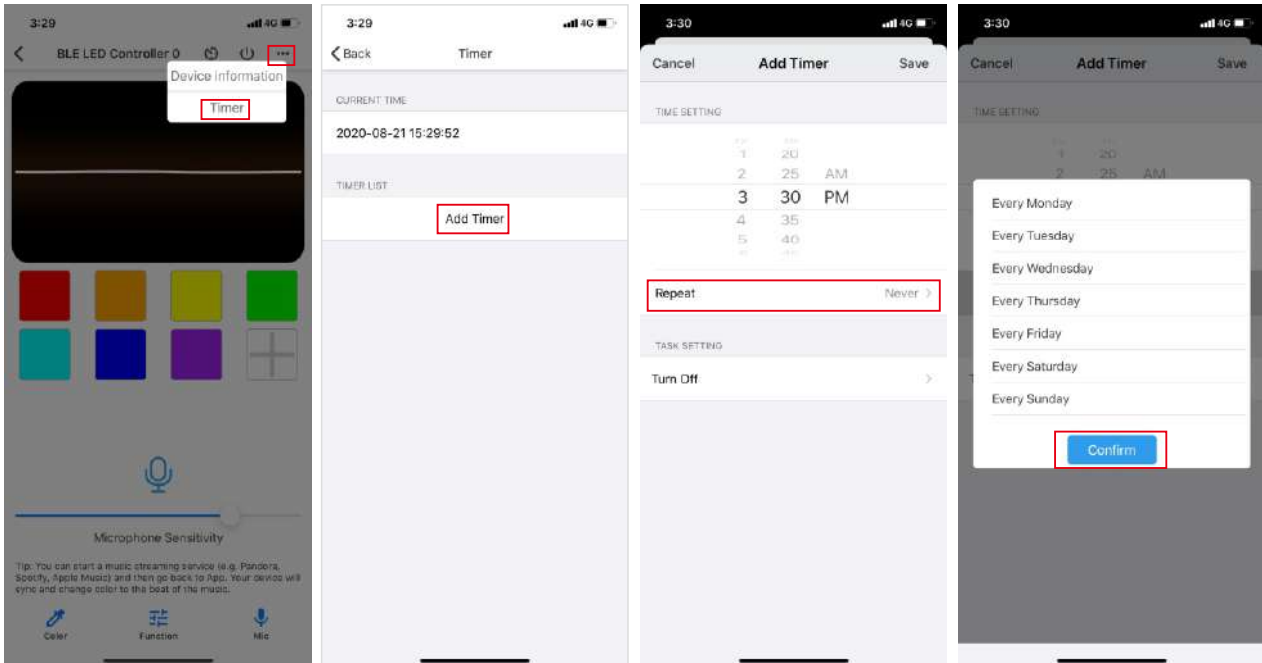

ATTENTIONS

1. Please use the product in a dry environment.
2. Please use the input voltage at 5-24V DC voltage, must not connect into 220V AC directly.
3. The product is requested common anode connection. The wrong connection will cause a malfunction.